


Fibre Optic Cabling

Foxtail - FC Type

The Fibre fox SOC Connector range has been designed for quick on site splice connectivity with great low loss levels and high durability. To be used with the Fibre fox range of fusion splicers.

The connectors are available for Single-mode and Multi-mode fibre and with a choice of strain relief boot depending on fibre type.

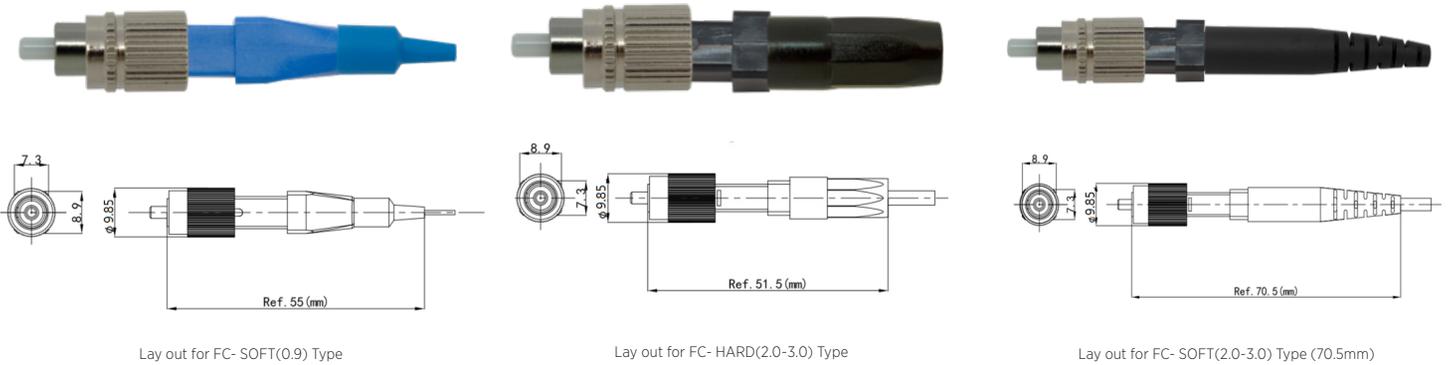

Features & Benefits

- Designed for quick on site splice connectivity
- Great low loss levels
- High durability
- Also available in LC, SC and ST for Single-mode and Multi-mode fibre.

Ordering Information

Product Description	Part Number
Foxtail SOC FC/PC 3mm Hard Boot	FT-HB3-FCUPC-xxx
Foxtail SOC FC/PC 2mm Hard Boot	FT-HB2-FCUPC-xxx
Foxtail SOC FC/PC 3mm Soft Boot	FT-SB3-FCUPC-xxx
Foxtail SOC FC/PC 2mm Soft Boot	FT-SB2-FCUPC-xxx
Foxtail SOC FC/PC 0.9mm Soft Boot	FT-SB9-FCUPC-xxx

xxx = Fibre Type OM1, OM2, OM3, OM4 & OS2

Product Specifications

Ferrule	<ul style="list-style-type: none"> • Out dia : 2.5mm • Material : Zirconia • Polishing : UPC Available
FC Connector	<ul style="list-style-type: none"> • Housing: Telcordia standard colour available : Green, Blue, Grey • Boot : Hard Type, Soft Type Boot available 2.0 - 3.0mm cable : Soft Type Boot 0.9mm cable
Fibre	<ul style="list-style-type: none"> • Fibre available : All type on request

FC Optical Characteristics

	Single Mode	Multi - mode
Insertion Loss	0.15 dB(average) 0.3 dB(maximum)	0.1 dB(average) 0.3 dB(maximum)
Return Loss	UPC ≤ -50dB	≤ -20dB

The FibreFox's FC Splice On Connector is designed to comply with IEC 61300-3-4 standard