



The 5/8-Port 10/100Mbps desktop switch TL-SF1005D/TL-SF1008D provide an easy way to expand your wired network. All RJ45 ports support Auto MDI/MDIX, eliminating the need to worry about the type of cable to use. Featuring full duplex mode, the switches can process data at a rate of up to 200Mbps making it an ideal choice for expanding your high performance wired network


Moreover, with innovative energy-efficient technology, the TL-SF1005D/TL-SF1008D can save power consumption, making them an eco-friendly solution for your home or office network.

TL-SF1005D is used for demonstration here.

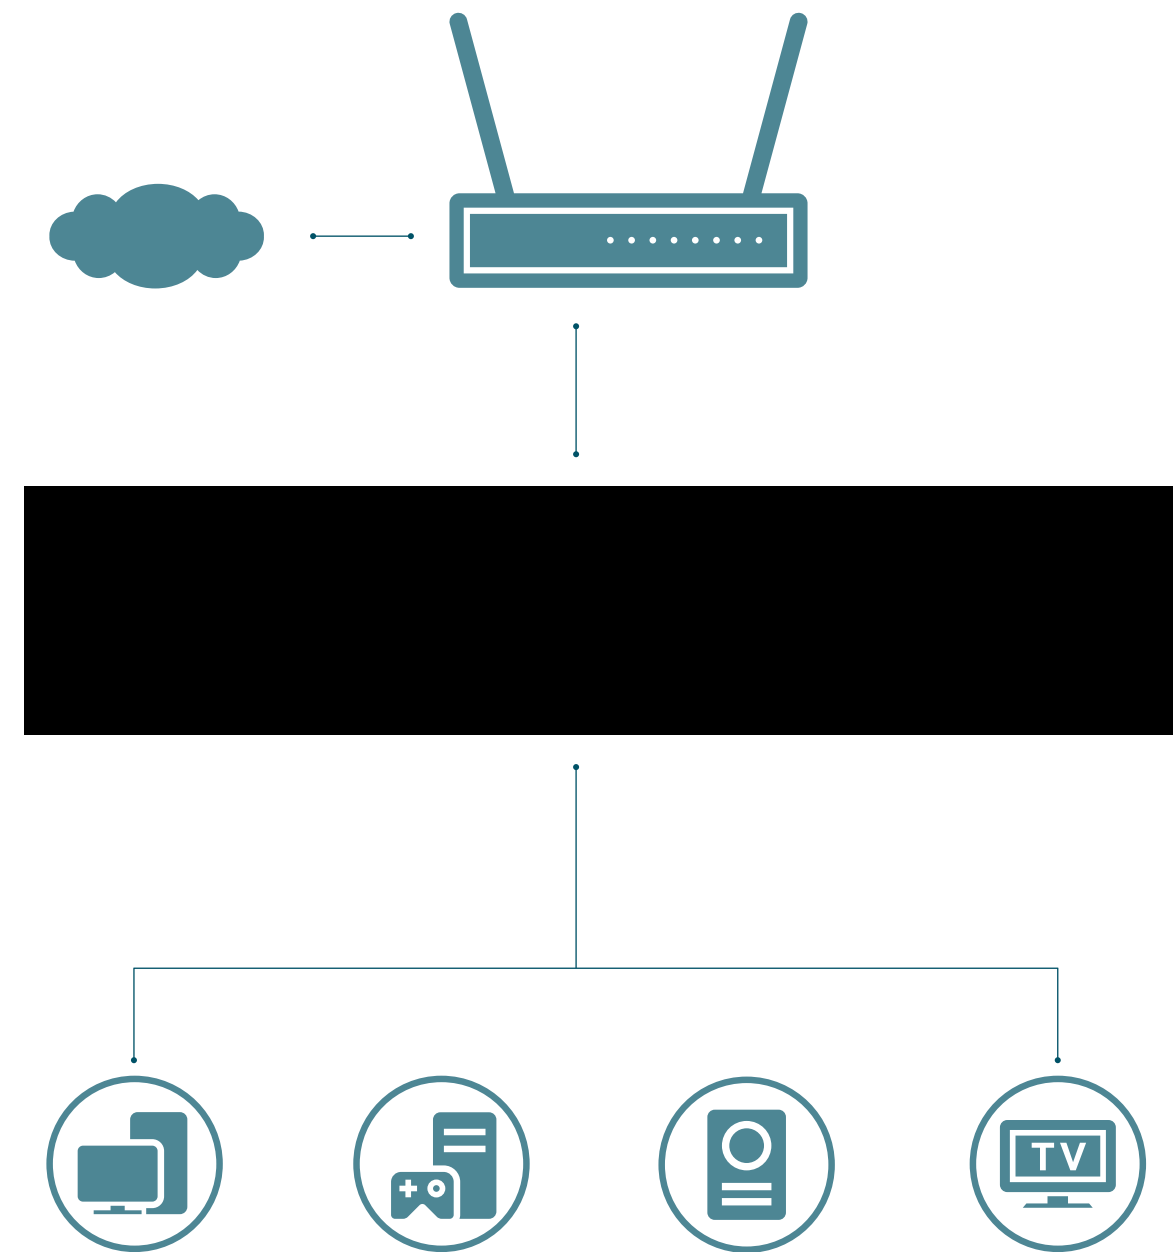



- TL-SF1005D equips 5 10/100Mbps ports, providing up to 1Gbps switching capacity
- TL-SF1008D equips 8 10/100Mbps ports, providing up to 1.6Gbps switching capacity



- Fanless design ensures quiet operation
- Green technology reduces power consumption
- IEEE 802.3x flow control provides reliable data transfer




- Just plug and play, no configuration required
- Compact design meets your needs in any circumstance
- Auto MDI/MDIX eliminates the need for crossover cables
- Auto-negotiation intelligently adjusts for compatibility and optimal performance

# Specifications

- Interface:  
TL-SF1005D: 5 10/100Mbps RJ 45 Ports, Auto Negotiation, Auto MDI/MDIX  
TL-SF1008D: 8 10/100Mbps RJ 45 Ports, Auto Negotiation, Auto MDI/MDIX
- Standards: IEEE 802.3, IEEE 802.3u, IEEE 802.3x
- Transmission Method : Store and Forward
- Advanced Functions: Green Technology, 802.3x Flow Control
- Max Power Consumption (220V/50Hz):  
TL-SF1005D: 1.87W; TL-SF1008D: 2.05W
- Power Supply: External Power Adapter (Output: 5VDC /0.6A)
- Certification: FCC, CE, RoHs
- Environment:  
Operating Temperature: 0℃ to 40℃ (32°F to 104°F)  
Storage Temperature: -40℃ to 70℃ (-40°F to 158°F)  
Operating Humidity: 10% to 90%RH, non-condensing;  
Storage Humidity: 5% to 90%RH, non-condensing

- Dimensions (W x D x H):  
TL-SF1005D: 4.1 × 2.8 × 0.9 in. (103.5 × 70 × 22 mm)  
TL-SF1008D: 5.3 × 3.1 × 0.9 in. (134.5× 79 × 22.5 mm)

- TL-SF1005D:

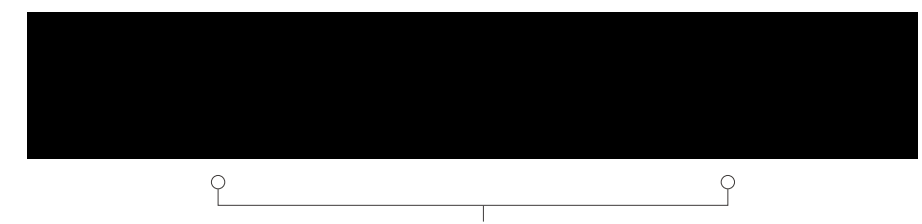

- TL-SF1008D:



- Package Contents:  
5/8-Port 10/100Mbps Desktop Switch TL-SF1005D/TL-SF1008D  
Power Adapter  
Installation Guide



For more information, please visit  
<https://www.tp-link.com/en/products/details/TL-SF1005D.html> & <https://www.tp-link.com/en/products/details/TL-SF1008D.html>  
or scan the QR code left and search for your product.

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-Link Technologies Co., Ltd.